




## Viton® SPECIFICATION SHEET

**STYLE 992:** Viton® Fluoroelastomer Rubber sheet is resistant to a wide range of oils and solvents. It exhibits good abrasion and tear resistance.

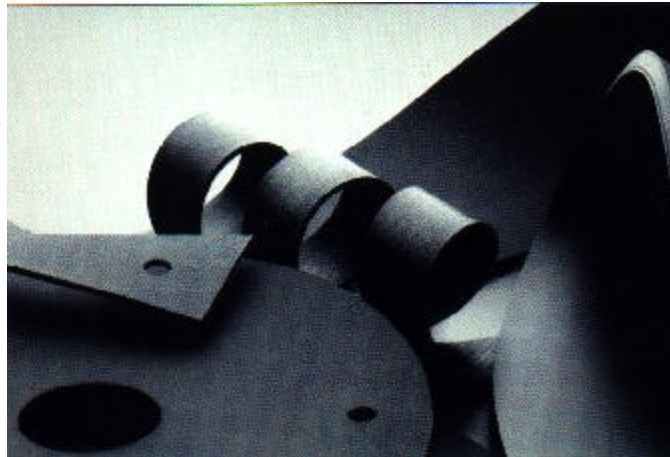

### Physical Properties:

<b>Material</b>	<b>Viton®</b>
<b>Color</b>	<b>Black/Brown</b>
<b>Durometer Shore (Hardness) ± 5</b>	<b>72 Shore A</b>
<b>Tensile Strength</b>	<b>1285 PSI</b>
<b>Elongation, %</b>	<b>286</b>
<b>Temperature Range °F</b>	<b>-40°F to 400°F</b>
<b>Average Weight (lb/sq. yd., 1/16")</b>	<b>5.5</b>

**April 1999**

Viton® is a Registered Trademark of DuPont Dow Elastomers, L.L.C.

The information, recommendations and opinions set forth herein are offered for your consideration, inquiry and verification, and are not, in part or total, to be construed constituting a warranty or representation for which we assume legal responsibility. American Seal & Packing makes no warranties with respect to such data and assumes no responsibility for performance characteristics resulting from conditions which differ from those used in laboratory tests.

**[To Find Out Where Your Company Can Get Viton® Fluoroelastomer, Click Here](http://www.usseal.com/viton.html)**